


Wiring diagram ekey sLine

DoorBird IP Video Door Station & Indoor Station



YOUR FINGER. YOUR KEY.

ID399/793/0/797: Version 1, 2023-05-15

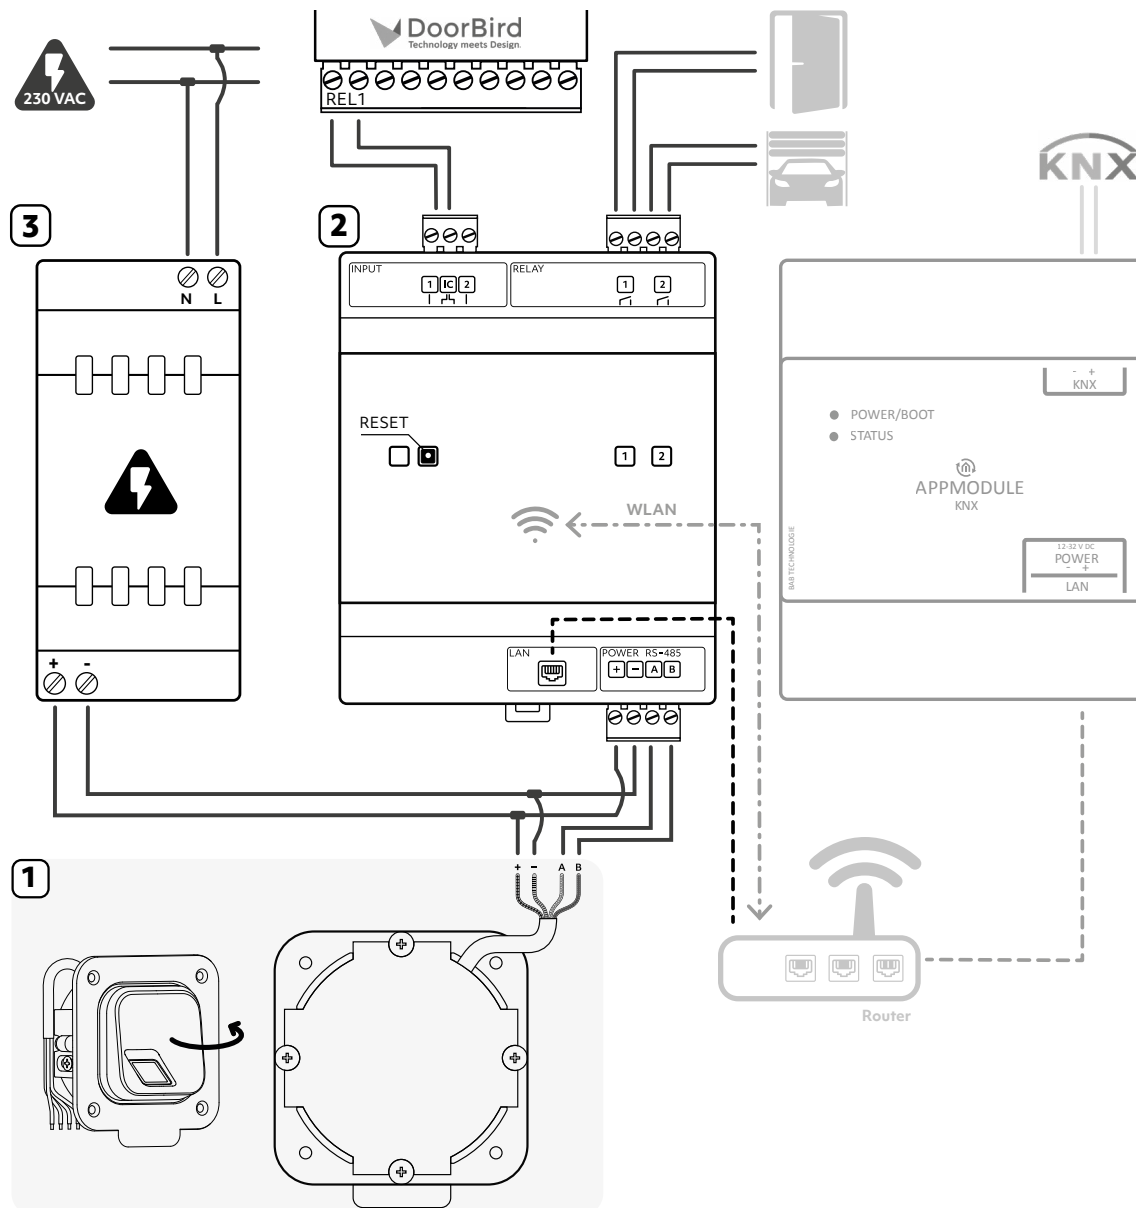

Video instructions

You can watch the video instructions for installing the ekey sLine by scanning the QR code.

1 Connection fingerprint scanner

White (+):	12-24 VDC
Brown (-):	GND
Yellow (A):	RS-485 A
Green (B):	RS-485 B

2 Connection control unit

+	12-24 VDC
-	GND
A:	RS-485 A
B:	RS-485 B
Relay 1:	potential-free
Relay 2:	potential-free
Input 1:	potential-free
Input 2:	potential-free
IC:	GND
LAN:	router
WLAN:	integrated

3 Connection power supply

Input:	230 VAC/50 Hz
Output:	12-24 VDC

POWER SUPPLY

Select the power supply based on the properties of the motorized lock.

RECOMMENDED CABLES

Power supply – control unit:

2 x 0,75 mm (H03VV-F)

Control unit – fingerprint scanner:

2 x 2 x 0,8 mm (EIB-Y St Y)

Max. cable length: 200 m

⚠ DANGER

Risk of electrocution: All ekey devices are to be operated with Safety Extra Low Voltage (SELV). Only use power supplies rated protection class 2 with safety approval according to EN 62368-1. Failure to do so will create a risk of fatal electrocution. Only certified electricians are authorized to carry out electrical installation work on mains systems.

⚠ ATTENTION

Property damage in the event of incorrect mounting and wiring: The system devices are operated using electricity. They could be destroyed if they are mounted and wired incorrectly. Mount and wire the system devices correctly before connecting the power.

📄 NOTICE

This wiring diagram is not subject to updating. We reserve the right to make technical modifications and change the product's appearance; any liability for errors and misprints is excluded.